


Niet-brandbare leidingen FLAMRO® BSB Stenenschot NBR-plus Firewrap

Brandstopstenen / Flexible Elastomeric Foam (FEF) isolatie /
Firewrap

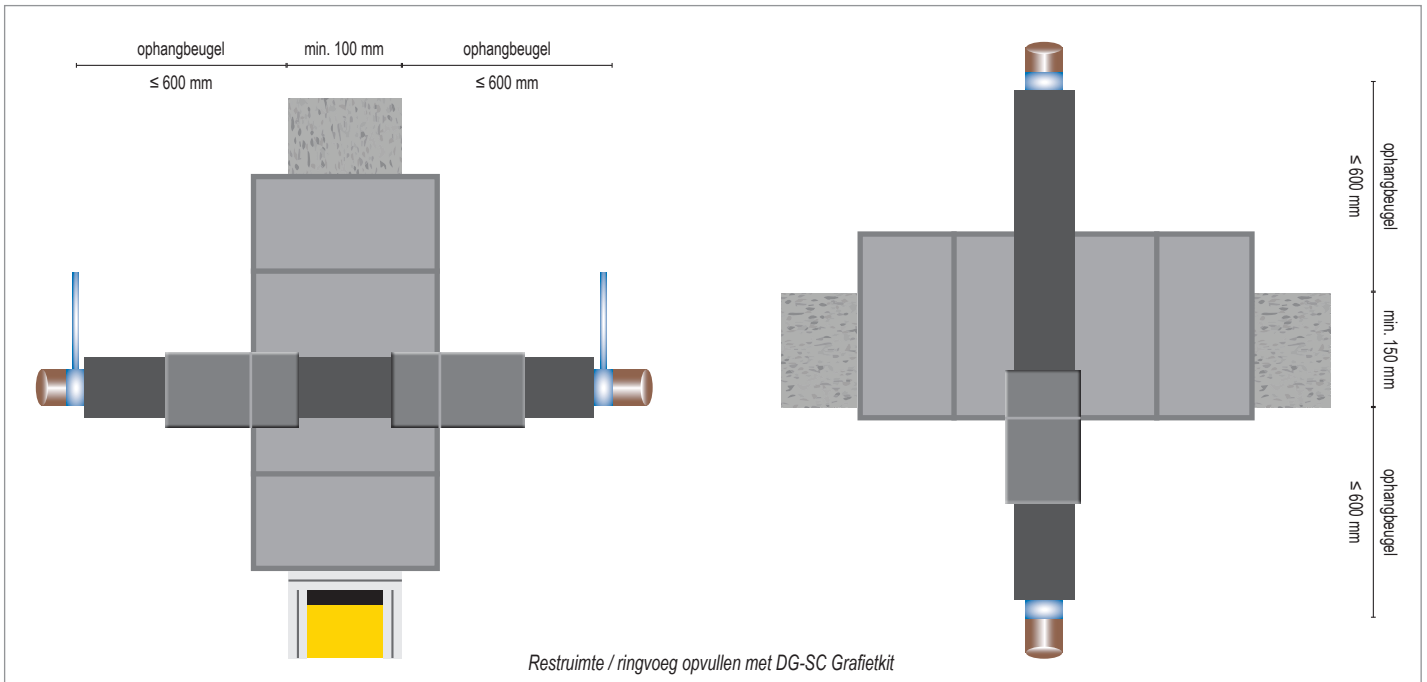

KB-Z-19-53-2608

Wall - Installation NBR-plus on both sides												
Pipe material/Type		Pipe outer Ø (mm)	Pipe wall thickness (mm)	Insulation	Insulation thickness T (mm)	Insulation length	NBR-plus fire protection wrap					Fire resistance class
							Width (mm)	No. of wraps	Inside seal (mm)	Outside seal (mm)	No. of layers	
	Copper, Steel, stainless steel or cast iron	≤ 54	1,5-14,2	Flexible Elastomeric Foam (FEF)	28,5	CS	-	-	-	-	-	EI = 90
		≤ 88,9	2,0-14,2		30,5		62,5	2	47,5	15	2	
	Klimaspit copper	≤ 10/18	1,0	PEF	9		125	2	50	75	1	
Floor - Installation NBR-plus on lower side												
	Copper, Steel, stainless steel or cast iron	≤ 54	1,5-14,2	Flexible Elastomeric Foam (FEF)	28,5	CS	-	-	-	-	-	EI = 90
		≤ 88,9	2,0-14,2		30,5		125	1	50	75	2	
	Klimaspit copper	≤ 10/18	1,0	PEF	9		125	1	50	75	1	
First support	≥ 100 - ≤ 600 mm		Max sparring	600 x 600 mm								

Deze handleiding dient als ondersteuning voor een juiste montage.

Voor uitgebreide montagedetails, zie *Installation Manual of classificatierapport*

Aan deze detailtekening kunnen geen rechten worden ontleend.

Bij afwijkende situaties raadpleeg onze technische support:

+31 10 72 71 044

info@svt-products.nl