


# Niet-brandbare leidingen FLAMRO® Novasit BM Mortelschot NBR-plus Firewrap

Brandwerende mortel / Flexible Elastomeric Foam (FEF) isolatie /  
Firewrap

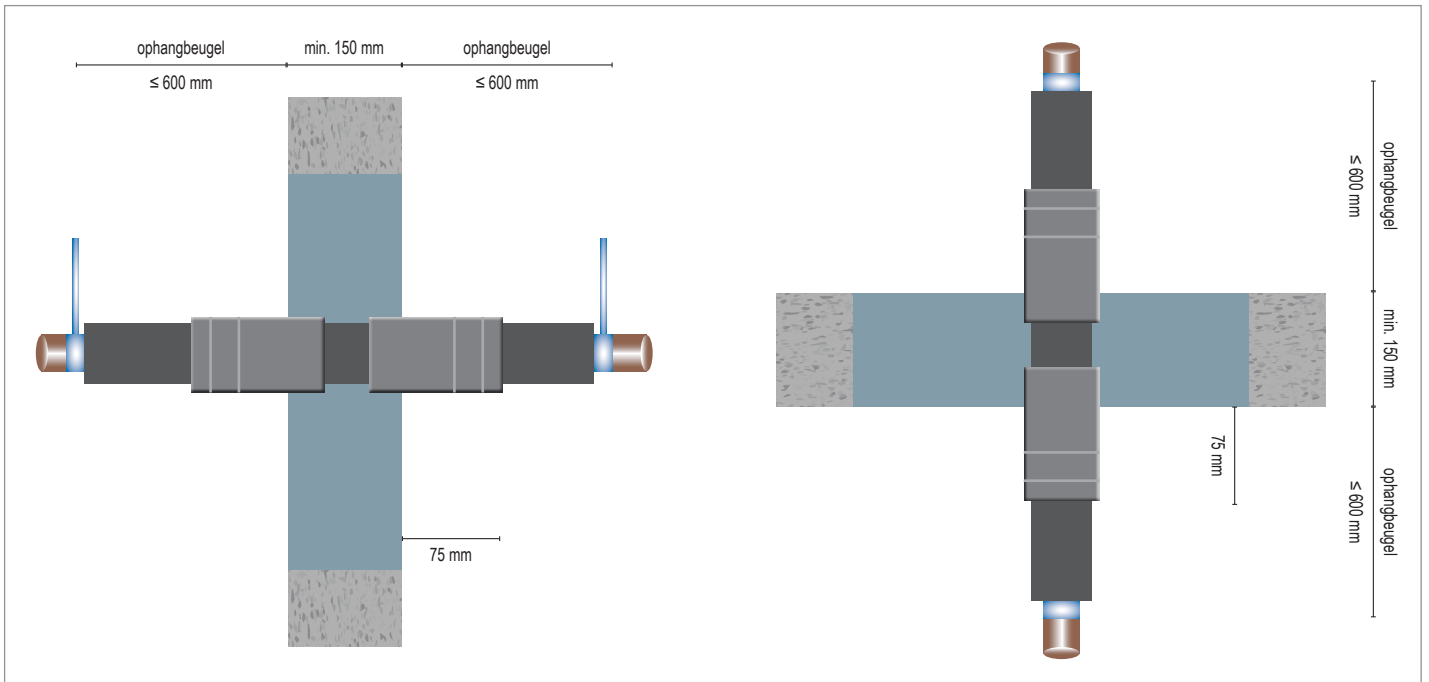

ETA 16/0132

Wall / Floor - Installation NBR-plus on both sides												
Pipe material/Type		Pipe outer Ø (mm)	Pipe wall thickness (mm)	Insulation	Insulation thickness T (mm)	Insulation length	NBR-plus fire protection wrap					Fire resistance class
							Width (mm)	No. of wraps	Inside seal (mm)	Outside seal (mm)	No. of layers	
	Steel, stainless steel or cast iron	≤ 168,3	≤ 6	Flexible Elastomeric Foam (FEF)	19-50	CS	125	2	50	75	2	EI = 90 C/U
		≤ 28	≤ 14,2		9 - 25							
≤ 42	10 - 44											
≤ 54	13 - 50											
≤ 76	13											
≤ 76	14 - 50											
≤ 88,9	19 - 50											
≤ 108	25 - 50											
	Copper											EI = 90 C/U*
												EI = 90 C/U
<b>First support</b>	≥ 100 - ≤ 600 mm		<b>Max sparring</b>	1000 x 2000 mm							* Just floor	

Deze handleiding dient als ondersteuning voor een juiste montage.  
Voor uitgebreide montagedetails, zie *Installation Manual of classificatierapport*

Aan deze detailtekening kunnen geen rechten worden ontleend.

Bij afwijkende situaties raadpleeg onze technische support:

+31 10 72 71 044

info@svt-products.nl